


***techno******spacio***✓

## TS-B-200 Brushless Product



# TS-B-200 DC Moment

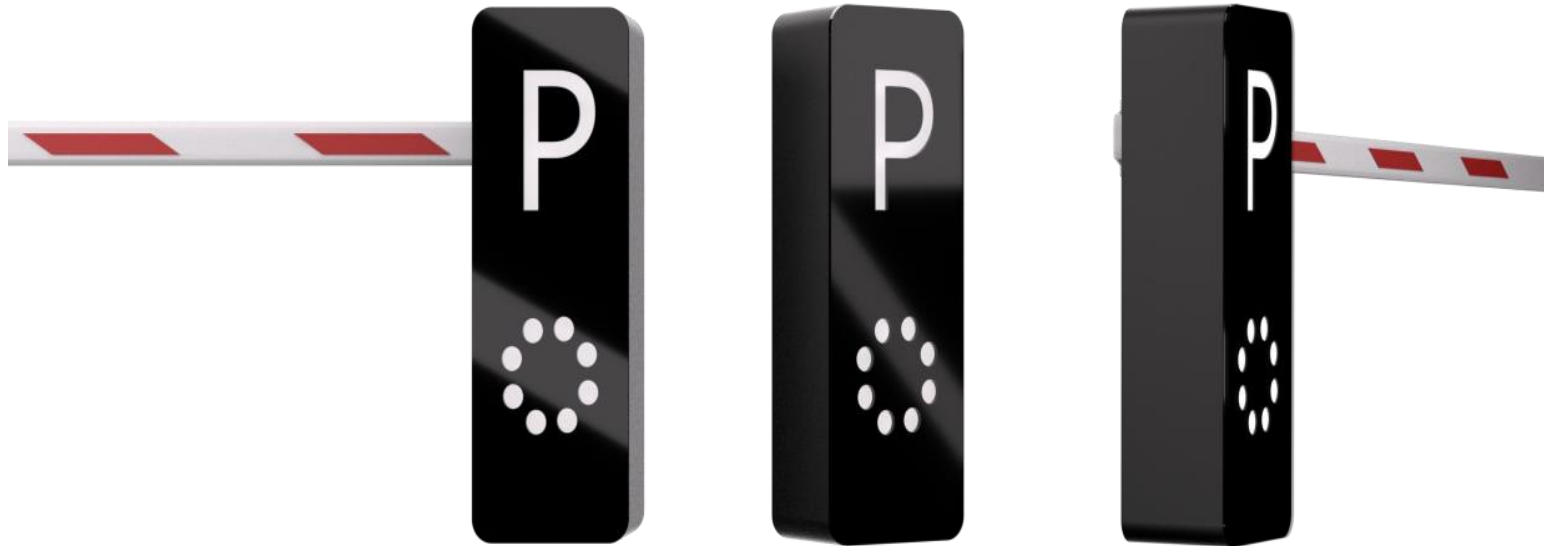


## Brushless DC movement

- Adjustable speed (0.8s-6s)
- Economical and stable
- Low technical requirements
- Wide range of market applications



## Brushless DC movement

- Connecting rod
- reduction gearbox
- brushless motor
- Manual remote control lever

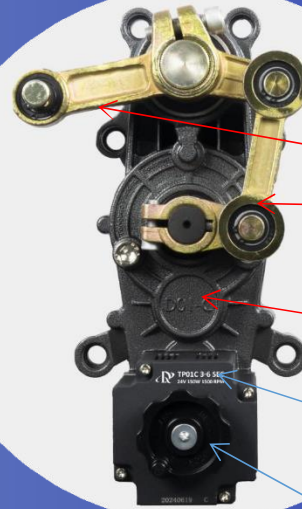

# Brushless barrier structure

Spring\*2 (4.5MM)

24V power supply

Air Switch

Brushless DC motherboard

Manual lifting lever



Motherboard key area

# Brushless DC mother board

24V power supply port

Motor line interface

Expansion interface (traffic light)

Gate opening signal

Drop rod anti-smash interface

Remote control receiver interface


485 communication interface




# Technical Specification

Size	980*320*230mm	Pole length	1-6Meter
Working voltage	AC220V	Operating speed	0.8-6 Sec
Motor power	150W	Service life	5 million times
Working temperature	-40°C to 80°C	Protection level	IP65
Rated voltage	DC24V	Chassis material	SS 304
Rated frequency	50-60/Hz	thickness	1.4 MM
Remote control distance	50 meters	Relative humidity	<95%, no Condensational at room temperature)

# Barrier pole specifications

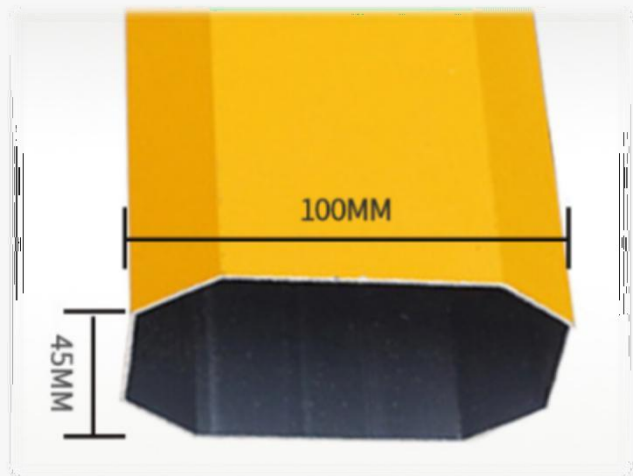

Octagonal pole

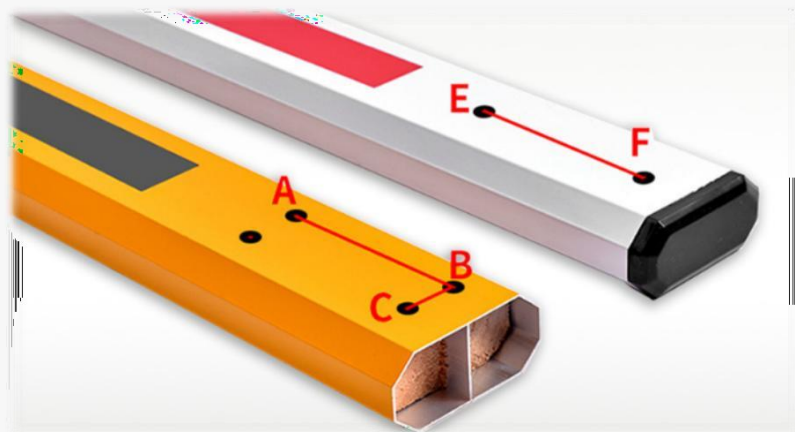

Pole hole spacing



Octagonal rod size measurement



Aluminum alloy foam round rod



telescopic rod



Carbon fiber foam rod

Thank You