
TECHNOSPACIO SLIDING SPEED GATE



Deluxe Square Head Sliding Turnstile Model:TS-WGS-500

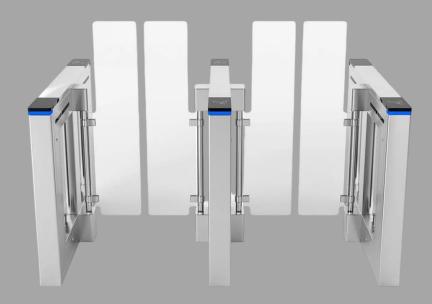

General Information:

TECHNOSPACIO sliding speed gates provide aesthetic and effective control of entry or exit at kinds of toll collection systems like train/metro stations, and access control for commercial centers, stadiums, schools, government and private sector buildings etc.

Main Features:

TS-WGS-500 deluxe square head sliding turnstile has high end looking and efficient throughput. Designed for heavy traffic sites with smooth and silent operation. They eliminate the need for attendants at entrances and provide a means to count the number of pedestrians entering into a facility. These turnstiles paired with card readers and electronic operation are the most popular choice for subway systems and can be found in most of them.

Access Control System (Optional)



SWIPE CARD

Access with authorized card and payment card sex piece swipe to open the way



IRIS RECOGNITION

Use the authorized eyes of Iris Recognition to pass through the entry gates



FINGER PRINT RECOGNITION

Access with authorized fingerprint authentication



PALM VEIN RECOGNITION

Use authorized palm vein recognition to pass into



COIN/TICK ET

Use disposable coins to coin through to enter



FACE RECOGNITION Use authorized face recognition to enter



QR CODE Scan in with

Scan in with authorization QR code and barcode



MANUAL OPERATION

Manual use of wired and

wireless to open gates for entry

Features



Appearance

High end appearance, Main body and lateral lids are AISI 304-grade stainless steel. Top lid:Black acrylic panel Flap panel:Acrylic/tempered,10mm thickness IR sensor:6 pairs(can be customized)



Brushless servo motor ensures the longer lifespan and smooth and durable running Self developed mainboard, ARM controltech

Famound brand electrical components



Safety and User-Orientated Design
1.2/1.5/1.8m high retractable glass door for
strict access control.
Precise and durable mechanisms for mass
traffic application sites.
Humanized indicator lights and voice



- Anti-climb/creep
- Anti-panic
- Anti-pinch

Easy Integration


Defaulted with card swiping window

covered with black acrylic panel. Wide compatible to various recogntion methods available Communicationinterface:Relay signal. Standardelectricalinterfacefor third party device.

TECHNOSPACIOprovides not only turnstile system but also completes olutions for our customers, for instance, online/offline ticketing/ attendance /visitor management/EU green pass and etc.



Measurement:

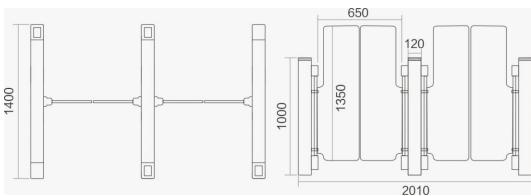

Brand name	TECHNOSPACIO
Mechanism part	Connecting rod structure
Motor type	DC brushless motor/ Servo motor
Flow rate	30 - 40 people/ minute
Passag e wid th(mm)	650 - 90 0
Rated Power	80W
Cabint material	SUS 304 main frame+front black paint+top Acrylic panel;
Infared sensor	6 pairs
Door heig ht(mm)	800/1200/1500/1800
Input/Output signal	dry contact/relay signal
Dimension	1600 * 3 0 0 * 1 0 00 mm
IR sensor(pair)	6 (defaulted)
Net weig ht	70 KG
Gross weig ht	75 KG
IP	IP 55
Operating Temperature	-28 °C- 60 °C
Operating Humidity	5% - 85%
Working Environment	Indoor/Outdoor covered
Voice prompt	Yes