





TS-F-700 Product Show

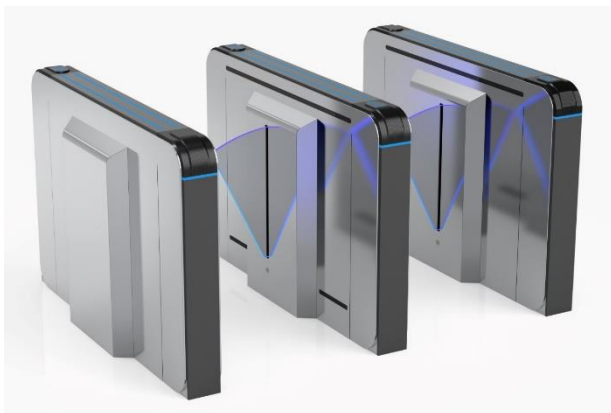

two-channel

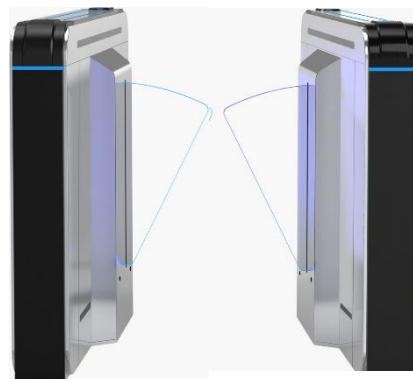

Single channel




Product model : TS-F-700

Functions & Features

- Reasonable and reliable design with low noise, smooth operation, and long service life.
- Anti-tailgating and anti-reverse passage functions.
- Card reading can be configured with memory or non-memory modes.
- Automatic reset function: After access is granted, the gate automatically returns to the locked state if no passage occurs within the preset time.
- Infrared anti-pinch (anti-clamp) protection when the gate is opening or in operation.
- Compatible with IC cards, ID cards, QR code scanning, and facial recognition systems.
- Multiple operating modes are available, including two-way card reading and one-way card reading.

Product Size

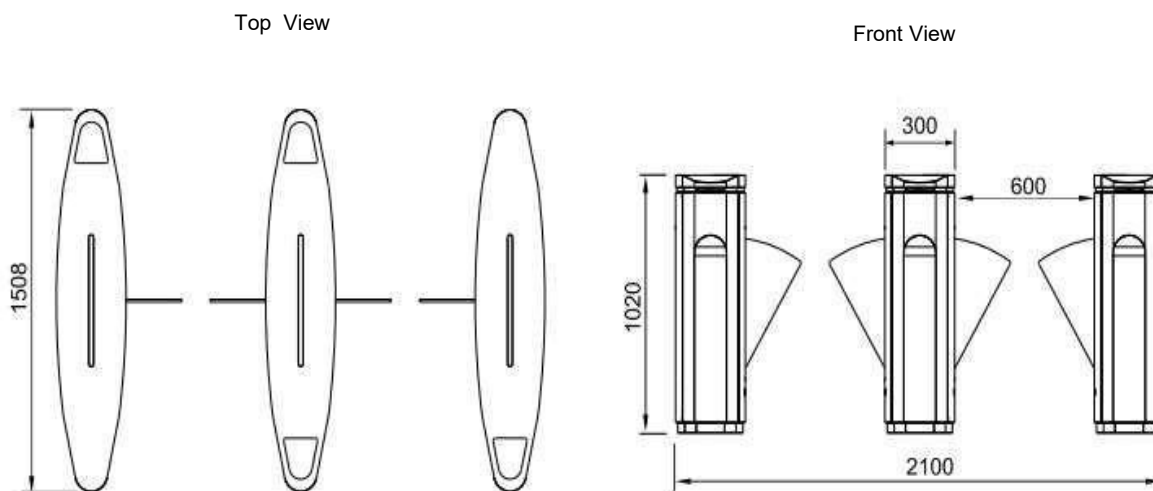

Product model : TS-F-700

Parameter

Brand Name	Technospacio
Size (L*W*H)	1508*300*1090mm
Pass width	600mm
Power	100W
Material/Thickness	SUS 304; 1.5 mm top / 1.2 mm side
Bar Material	Clean Acrylic+RGB light
Movement	Servo motor movement of Flap Barrier Gate
IR Sensor	6 pairs
Indicator Light	RGB light
Power Supply	AC 110–220V, 50/60Hz
Control Unit	Servo motor control system
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	≤90% No condensation
IP	IP54
Environment	Indoor/Out Door (Covered)
MCBF	10 million

